

AGSMERLINCS2

Datasheet

Double Current Switch



Product Overview

The Merlin CS2 is a method used for interlocking a kitchen's gas supply with the ventilation system. As an alternative to air pressure differential switches the CS2 is designed to monitor the current going to up to two mechanical fans. When the fan is running and a current is being drawn along the live feed, a magnetic field is induced through the coil and the current switch will send a closed contact along two low voltage cables to any AGS controller. Gas can now be introduced into the kitchen.


If the CS2 can not detect any current, the CS2 will switch the normally closed dry contact to open and will send a signal back to the connected AGS controller to shut off the utility supply i.e. fuel gas to the kitchen range.

Key Features


- ✓ Single current switch - most commonly used to monitor the current of a mechanical fan.
- ✓ 0.085a-50a current range.
- ✓ Straight forward to install and calibrate.
- ✓ 3 Year AGS Warranty.

Open Circuit - The Merlin CS2 cannot detect current
Closed Circuit - The Merlin CS2 can detect current

Wiring Diagram

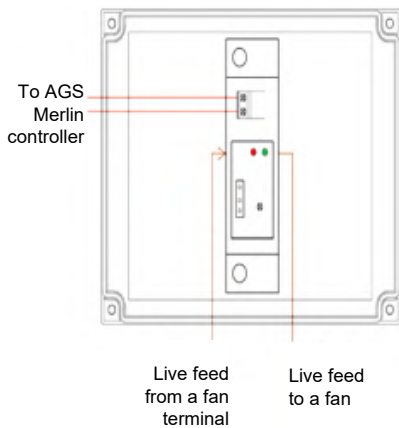

Typical Current Switch Example

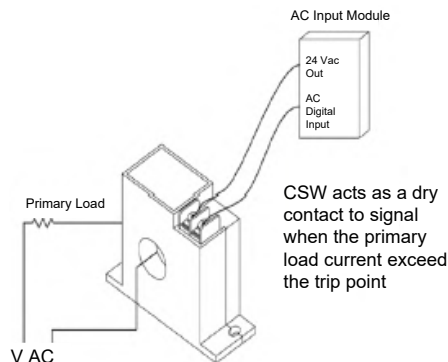

Technical Specifications

Power Supply:	None – Self Powered
Set-point:	0.5A...200A
Output Switch:	0.3A @ 135V ac/dc
Hysteresis:	<2% FS max
Response Time:	<200mS
Dimensions (mm):	61 x 90 x 25
Enclosure Material:	UL 94V-0 flammability
Conductor Hole Diameter (mm):	rated ABS 19mm
Operating Temperature:	-25°C to 70°C CE /
Certification:	UL / RoHS

Find out more

American Gas Safety LLC

www.americangassafety.com

Head office:

6304 Benjamin Road, Suite 502, Tampa, FL 33634

Tel: (727) 608-4375

Email: info@americangassafety.com

