## **Flush Mounting Enclosure**







## **Specifications**

- > 16 gauge steel
- > Seams continuously welded and ground smooth
- > Corner-formed doors
- > Simple easy-to-remove and install hinge pins with built-in captivation clip
- > High-torque threadless studs and fasteners on door
- > Minimum-width body flange provides maximum door opening (210 degrees)
- > Door opens 210 degrees
- > External formed body flange
- > Panel mounting studs fit optional panels and other accessories
- > Mounting holes in back of body for optional external wall-mount brackets
- > Removable door with hidden hinges for clean, aesthetic appearance
- > Seamless foam-in-place gasket
- > Quarter-turn slotted latch(es)
- > Grounding stud on body; bonding provision on door Hardware kit with panel mounting nuts, panel grounding hardware and sealing washers Installation instructions provided
- > Flush-Mount models have a mounting frame that extends completely around the enclosure

#### Finish

> RAL 7035 textured light gray polyester powder paint inside and out

### **Dimensions**

- > Height 30 inches
- > Width 24 inches
- > Depth 8 inches

#### **Standards**

- > UL 508 Type 3R, 4, and 12
- > CSA Type 3R, 4, and 12
- > Complies with NEMA Type 3R, 4, and 12


**Gas Safety Systems** 

**Utility Control** 

2018

# **Flush Mounting Enclosure**



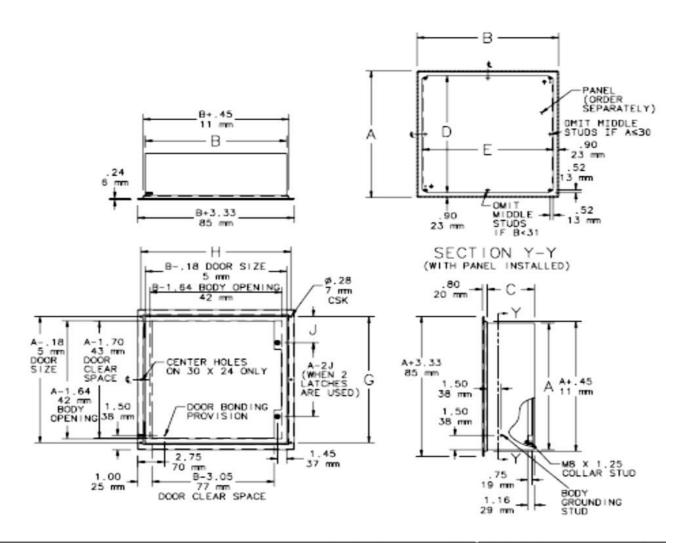

AxBxC in./mm	Finish	Door Ga.	Body Ga.	CONCEPT Panel	Panel	IN./mm	in./mm	Latches qty.	Latches style	in./mm
30.00 x 24.00 x 8.00 762 x 610 x 203	RAL 7035 Lt. Gray	14	16	CP3024	CP3024G	28.20 x 22.20 716 x 564	30.75 x 26.25 781 x 667	2	Quarter-turn	5.00 127

UL 508A Listed; Type 4, 12; File No. E61997 cUL Listed per CSA C22.2 No. 94; Type 4, 12; File No. E61997

NEMA/EEMAC Type 4, 12, 13 CSA, File No. 42186: Type 4, 12 VDE IP66 IEC 60529, IP66