

AGS-ENC-30248-FM


Flush Mount Enclosure

30in x 24in x 8in



Specifications:

- 16 gauge steel
- Seams continuously welded and ground smooth
- Corner-formed doors
- Simple easy-to-remove and install hinge pins with built-in captivation clip
- High-torque threadless studs and fasteners on door
- Minimum-width body flange provides maximum door opening (210 degrees)
- Door opens 210 degrees
- External formed body flange
- Panel mounting studs fit optional panels and other accessories
- Mounting holes in back of body for optional external wall-mount brackets
- Removable door with hidden hinges for clean, aesthetic appearance
- Seamless foam-in-place gasket
- Quarter-turn slotted latch(es)
- Grounding stud on body; bonding provision on door
- Hardware kit with panel mounting nuts, panel grounding hardware and sealing washers
- Installation instructions provided
- Flush-Mount models have a mounting frame that extends completely around the enclosure

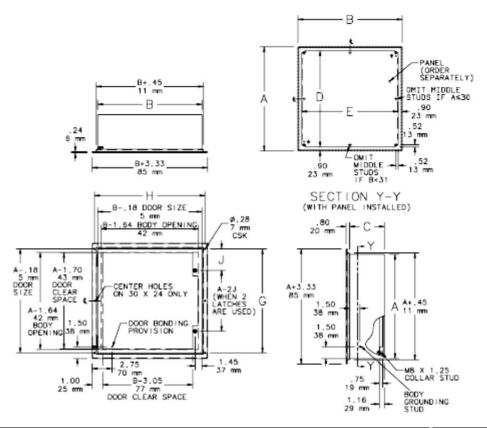

| AxBxC in./mm | Finish | Door Ga. | Body Ga. | CONCEPT Panel | CONCEPT Panel | Dx E in./mm | Gx H in./mm | Latches qty. | Latches style | J in./mm |
|---|-------------------|----------|----------|---------------|------------------|----------------------------|----------------------------|--------------|---------------|-------------|
| 30.00 x 24.00 x 8.00 762 x 610 x 203 | RAL 7035 Lt. Gray | 14 | 16 | CP3024 | CP3024G | 28.20 x 22.20 716 x 564 | 30.75 x 26.25 781 x 667 | 2 | Quarter-turn | 5.00 127 |

UL 508A Listed; Type 4, 12; File No. E61997 cUL Listed per CSA C22.2 No. 94; Type 4, 12; File No. E61997

NEMA/EEMAC Type 4, 12, 13 CSA, File No. 42186: Type 4, 12 VDE IP66 IEC 60529, IP66

Finish

RAL 7035 textured light gray polyester powder paint inside and out





AGS Head Office

Tel: (727) 608-4375

Fax: (727) 538-4237

in fo@american gassafety.com