


#### TERMINAL BLOCK LEGEND

NO — NORMALLY OPEN
NC — NORMALLY CLOSED
C — COMMON

#### ALL TERMINALS ACCEPT TWO 12 TO 18 (AWG)




VOLTAGE	RATED AVERAGE CURRENT
250 VDC	1 AMP
600 VAC	3 AMP

NOTE: SS-2XX4/LT CONTACTS ON FORM C TIMER RATED: 120 VAC, 3A  
28 VDC, 3A

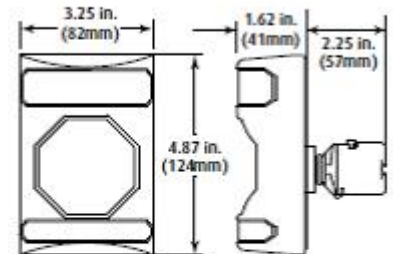

\*NOTE: TO PROVIDE ADEQUATE CLEARANCE FOR INSTALLATION MAY REQUIRE: SUB-102722 SPACER,

#### PRODUCT DIMENSIONS

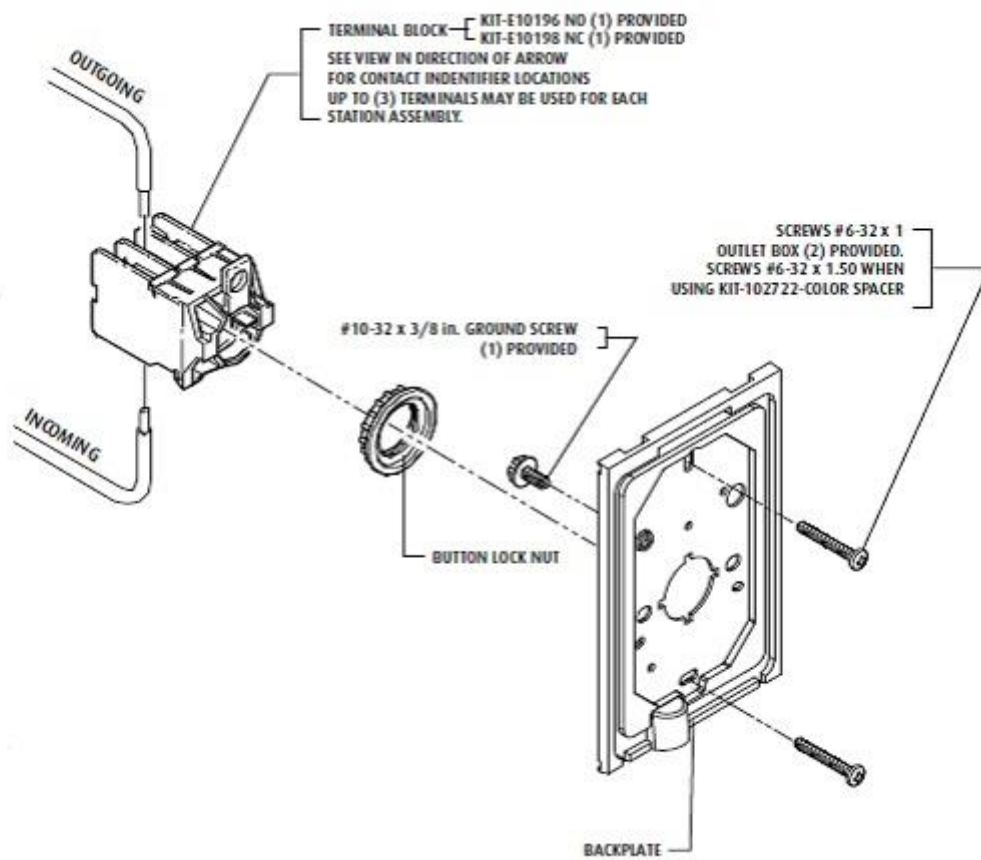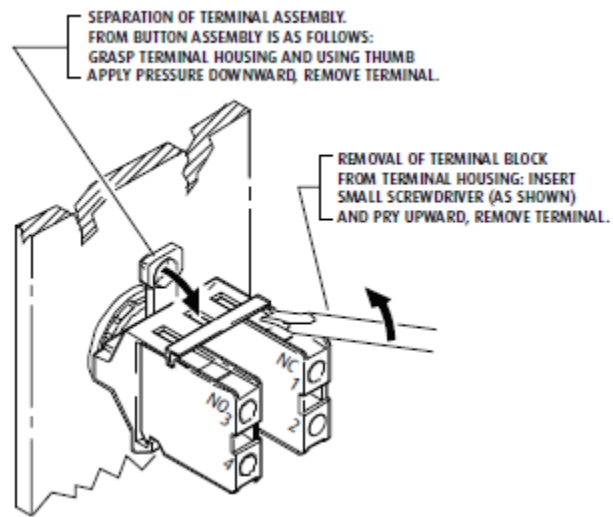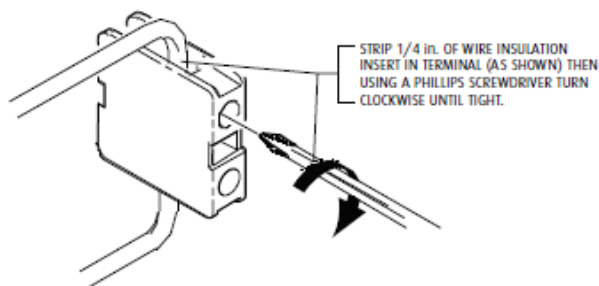



AGS Head Office

Tel: (727) 608-4375

Fax: (727) 538-4237

info@americangassafety.com