


# Series SOLVL12 Solenoid Valve



## Product Overview

Model #W4B19-00E-09  
 2-way, internally piloted, normally closed solenoid valve


1/2"	1/2"	4.80	120 VAC	8 Watts	2-230 psi
Pipe Size (Inch)	Orifice Size (Inch)	Flow Factor (CV)	Voltage (AC)	Wattage (W)	Pressure
EPDM/NSF	14°–280° F	Cable Grip DIN	Portable Water		
Sealing Material	Temperature Range	Connector Supplied	Medium Examples		

## Materials of Construction

Body	Lead Free Brass
Armature Tube	Stainless Steel 300
Fixed Core	Stainless Steel 400
Plunger	Stainless Steel 400
Spring	Stainless Steel 300
Shading Ring	Copper
Orifice	Lead Free Brass

## Valve Dimensions

Valve Width (A):	1 9/16"
Valve Length (B):	2 19/32"
Valve Height (C):	3 3/16"
Coil Width (D):	1 3/16"
Coil Length (E):	1 21/32"
Coil Length (F):	2 1/8"

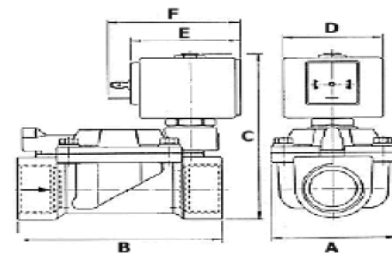

Note: The valve pictured above is with a simple coil, which may or may not reflect the exact specifications of the this particular build.

## Electrical Specifications

Rating	NEMA 4
Holding VA	25
Inrush VA	14.0



## Gas Safety Systems

American Gas Safety, LLC. 4500 140<sup>th</sup> Ave N. Suite 101. Clearwater, FL 33672 T.(727) 608-4375 F.(727) 538-4237 [www.americangassafety.com](http://www.americangassafety.com)

## Utility Control