

Emergency Shut-Off Button



Description

The AGSPBTW, multipurpose push button to be used for a wide range of applications, most commonly used with the AGS Merlin range of gas safety systems.

The AGSPBTW is a remote mounted push-to-break contact/twist-to-reset emergency push button. It has a plastic wall mounting box, screw fix to flat surface. Connect electrical supply through single pole switch block via screw terminals.

Key Features

- > Protects against vandalism, accidental damage, dust and grime
- > Indoor use only
- > Twist Release Reset

General Information

- > One year manufacturers warranty.

Construction

- > UL Listed to U.S. and Canadian safety standards.
- > Contacts: - 10a 500v max single pole
- > Temperature range: - 25°C to + 70°C protection: - IP40


Gas Safety Systems

American Gas Safety, LLC. 4500 140th Ave N. Suite 101. Clearwater, FL 33672 T.(727) 608-4375 F.(727) 538-4237 www.americangassafety.com


Utility Control

Emergency Shut-Off Button


Dimensions

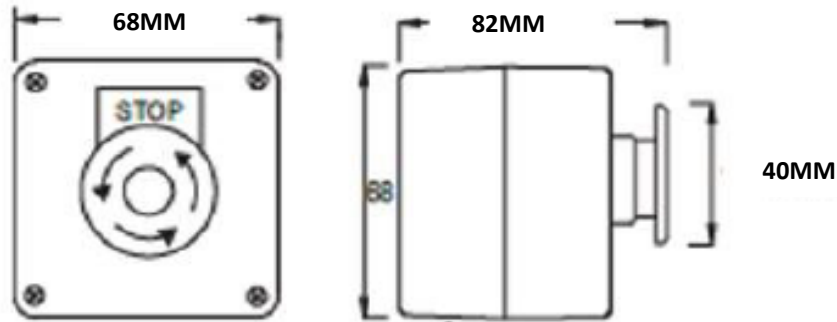

Example installation - Merlin GDP2 Gas Detection System & AGSPBTW

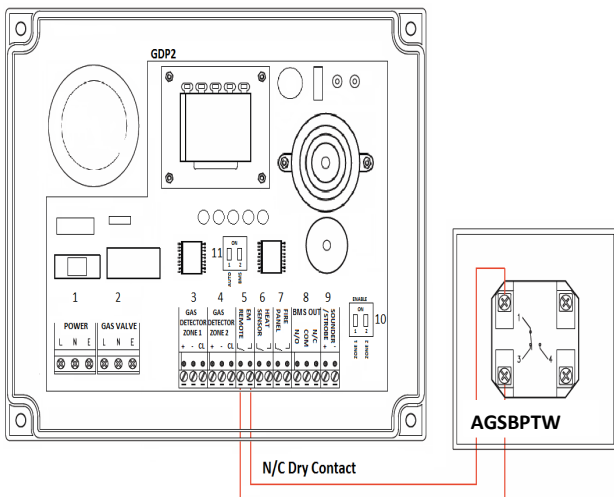

Example installation - AGSPBTW Gas Solenoid Valve Emergency Shutdown

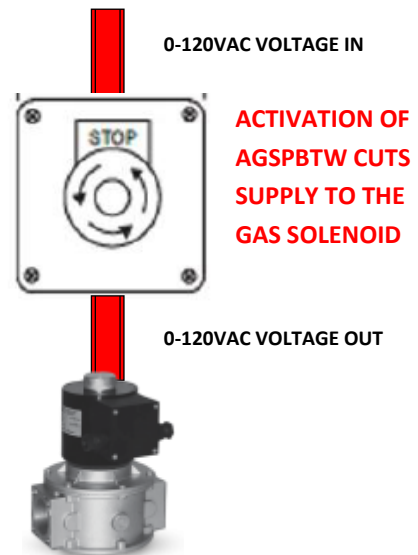

Warranty:

Three year warranty as standard. For more information contact American Gas Safety -
www.americangassafety.com / (727)-608-4375 / info@americangassafety.com

Gas Safety Systems

American Gas Safety, LLC. 4500 140th Ave N. Suite 101. Clearwater, FL 33672 T.(727) 608-4375 F.(727) 538-4237 www.americangassafety.com

Utility Control