

AGSMerlin6INF

Datasheet

6" Flanged Gas Solenoid Valve
 2-Way, Internally Piloted, Normally
 Closed, 0-20PSI / 120VAC



120VAC Power
 Input



UL Listed



Normally
 Closed Safety
 Shutoff With
 Assisted Lift



0-20PSI"
 Pressure Rating

Other Pressures
 Also Available

Standards



Product Overview

AGS gas solenoid valves control the flow of natural and LP (liquefied petroleum) gases and are most commonly used in with our range of utility controllers and gas detection systems. Designed for ON/OFF service.

Technical Specification

Pipe Size (Inch)	Cv Flow Factor	Gas Capacity	Operating Pressure	Max. Fluid Temp
6" (Flanged)	1020	50,000 Cu.Ft/hr	0-20PSI	150 °F

Opening Time	Closing Time	Enclosure	Ambient Temperature	Pipe Taps
27 seconds max.	1 second max.	Type 4	-40°F to 150°F	1/4"

Power Requirement	Standard Voltage
324 VA	120VAC / 60Hz

Mounting Position

Multi-Pose, may be mounted in any position.


WARNING

If the flow is not in the same direction of arrow, valve may not shut off.



Dimensions:

A	B	C	D
17.81"	29.75"	5.13"	10.35"

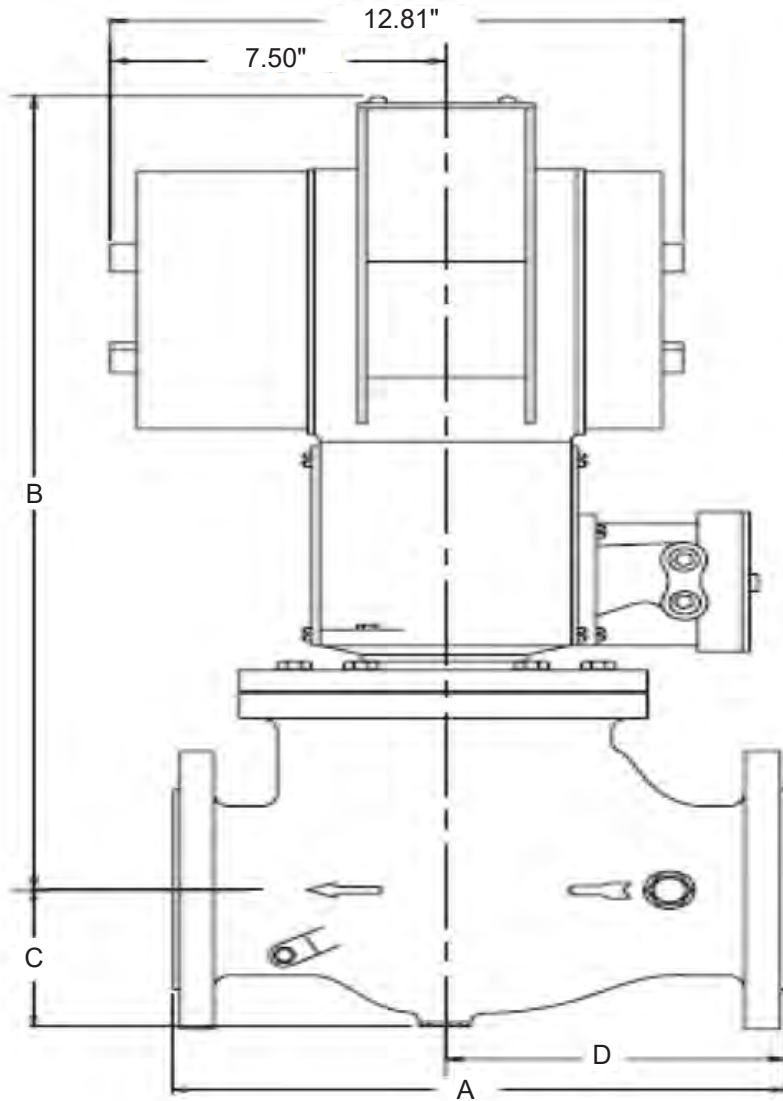

Find out more

American Gas Safety LLC

www.americangassafety.com

Head office:

6304 Benjamin Road, Suite 502, Tampa, FL 33634

Tel: (727) 608-4375

Email: info@americangassafety.com

