

AGS1000Si Datasheet

Single Output Gas Feature Controller





Product Overview

The UL 61010 listed Merlin 1000Si Utility Controller gives the user complete automatic control over single or multiple gas features. The key lock ensures that only authorized personnel can operate the utilities. The emergency panic button is shrouded to ensure no accidental shutdowns occur. All the Merlin utility controls come with clearly labeled PCB boards to ensure easy installation. Additional gas detection sensors can be wired to the unit for extra safety.

Built-in connectivity to existing BAS systems and inputs for existing fire alarms make the unit perfect for renovation projects as well as new builds. Dip switches on the reverse side of the front panel allow for on site adjustments of various parameters including how the unit communicates with the BAS system and the system time-out function. External timers can be added to the system to provide a 24/7 digital timed supply of gas.






Product Specifications

Model:	Merlin 1000Si
Visual Indication	LED
Mains Electrical Power Input	110-120VAC
Gas Valve Output	110-120VAC
Current Consumption	12W max (50mA) @ 120VAC
Internal Fuse	3.15A
Gas Valve Output	3.15A
Operating Temperature	32 - 104°F 0-95%RH Non-Condensing
Audible Alarm Buzzer dB	65 dB (300mm distance in quiet conditions)
Housing Material	Polylac PA-765 Flame Retardant
Flame Rating	UL 94
UL Approval Reference	UL 61010-1 E464760
O/All Dimensions (H x W x D) inch	7.08 x 10 x 3.03"
Language:	English

Merlin 1000Si Wiring Example

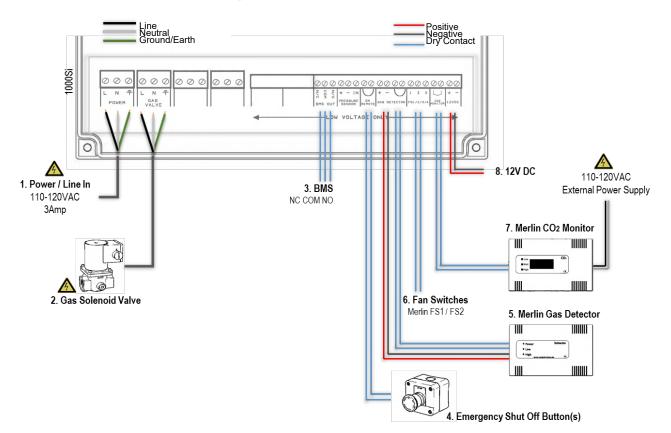

Find out more

American Gas Safety LLC

www.americangassafety.com

Head office: 6304 Benjamin Road, Suite 502, Tampa, FL 33634

Tel: (727) 608-4375 Email: info@americangassafety.com