

PREVENT WATER USE DURING TESTING

TIMED CONTROL FOR DRUG **TESTING LAB** WATER SUPPLIES

TIMED WATER CONTROL

LOCKABLE COVER AVAILABLE



Automatic or Manual

Control over water



Dry Contact Inputs

For remote panic buttons and fire alarms



Four Timed Delay Options

2 minutes, 5 minutes, 10 minutes or timed water cut off disabled



Easy To Use

Clear LED status display



Adaptable Utility Output For water or electric control 110VAC or 24VAC/DC



Modern & Compact Design

Strong polyac PA-765, designed to withstand daily use



Power Supply

110VAC or 24VAC/DC



Optional Covers Available

Wall mounted with flush or lockable shield available

PRODUCT OVERVIEW

0.137" / 3.5mm DIA. mounting holes x8


3.54" / 90mm

4.84" / 123mm

The AGSTWC provides a timed supply of water via a 110VAC or 24VAC/DC normally open water solenoid valve, or an electrical power supply.

Typically used for drug testing laboratories to comply with the Department of Transportation (DOT) 49 CFR 40.43 - Subpart D. Each controller has a selectable time out function built-in via internal dip switches, for 2 minutes, 5 minutes, 10 minutes or timer disabled. When the timer has reached the owner's selected setting, the front LED will flash to warn user of the time out.

The AGSTWC is manufactured in a modern polycarbonate enclosure which provides protection from damage. The AGSTWC is designed to replace contractor constructed solutions for timed supply and panic shutdown, incorporating a crucial reset of the timed supply after a panic shutdown.

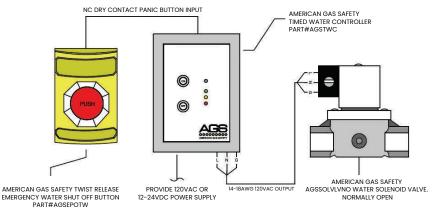

PROVIDING SAFETY & CONTROLS IN

- SCIENCE LABORATORIES BOILER ROOMS
- COMMERCIAL KITCHENS PARKING GARAGES EMS STATIONS


FIND OUT MORE

info@americangassafety.com (727)-608-4375



SIMPLE OPERATION



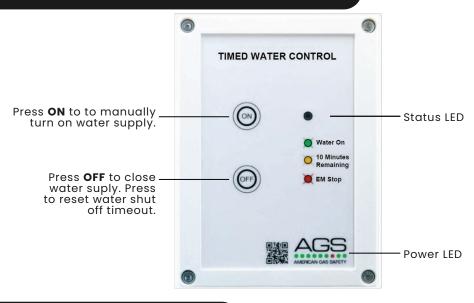



Green. Remains illuminated when water valve is closed.



Amber. The controller LED will turn amber ten (1) minute before the automatic water shut off timeout is reached and the buzzer will beep, and the amber LED will then intermittently flash. After this time, the water will automatically turn on until reactivated.



Red. Remains illuminated when a remote emergency stop device has been activated. The water supply is isolated until the emergency has been investigated, rectified, and reset. Press ON to re-enable/open the water supply.

PROTECTIVE COVERS AVAILABLE



These indoor/outdoor low-profile covers protect devices without restricting legitimate operation.


The versatile cover offers excellent protection against physical damage (both accidental and intentional), dust and grime as well as severe environmental conditions inside and out.

Wall Mount Cover: AGSTWCWMCOVER

Flush Mount Cover: **AGSTWCFMCOVER**

PLUG & PLAY INSTALLATION

Internal Fuse: Anti-Surge 3.15A 250V~ Wire Rating Min. 18AWG Tinner Copper @ 167°F

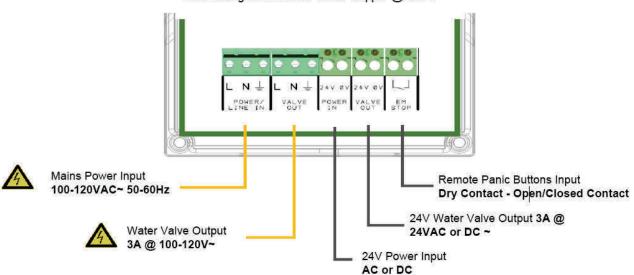

PROVIDING SAFETY & CONTROLS IN

- SCIENCE LABORATORIES
 BOILER ROOMS
- COMMERCIAL KITCHENS PARKING GARAGES EMS STATIONS

FIND OUT MORE

info@americangassafety.com (727)-608-4375

