


Installation


Bracket allows electrical wires to be pulled before installing the Merlin controller




Bracket comes with knock outs for conduit top and bottom. Use mounting hardware to secure the bracket in place. Note: additional holes may be drilled through the bracket to ease installation.



Merlin panel is secured in place with provided hardware. Space above and beneath the Merlin panel allows for easier installation of conduit connectors.

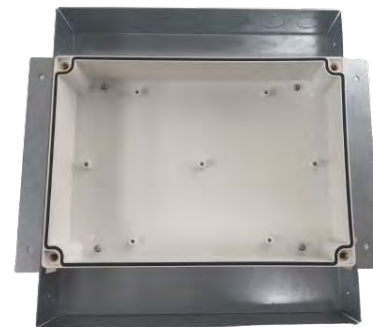

Fold out wing brackets for framed installation. The wings provide a 1/2" space to allow for drywall install.

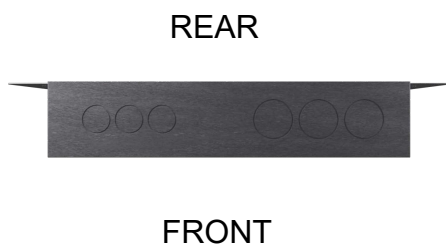

Flush With Finished Surface

Install the bracket so that the leading edge is flush with the finished surface. This will allow the Merlin panels fascia to be proud of the finished surface.

Leading edge, flush with finished surface



IMPORTANT

The Flush Mount Kit comes with a decorative surround strip that covers the gap between the bracket and the Merlin Panel. The surround is 1/4" thick white HDPE plastic and is secured in place with construction adhesive. Allow 2+1/4in perimeter around the Merlin panel install to accept the decorative surround.

Find out more

American Gas Safety LLC

www.americangassafety.com

Head office:

6304 Benjamin Road, Suite 502, Tampa, FL 33634

Tel: (727) 608-4375

Email: info@americangassafety.com

