

AGSESOKLWMA

Datasheet

Emergency Power Off Push Button
 With Keyed-Reset, Weatherproof
 Cover & Audible Alarm



Product Overview

The AGS-ESOKLWMA, multipurpose push button to be used for a wide range of applications with the AGS Merlin range of gas safety systems.


The AGS-ESOKLWMA is a keyed reset, flush mounted button and comes with a clear protective cover to avoid accidental activations. It also has an audible alarm if the protective shield is opened.

Key Features


- ✓ Protects against vandalism, accidental damage, dust and grime
- ✓ For indoor and outdoor use
- ✓ Keyed release reset
- ✓ ADA Compliant
- ✓ Various colors, text & design types available upon request

Construction

Station housing molded of tough polycarbonate
 Typical working properties of polycarbonate are -40° to 250°F (-40° to 121°C)
 UL listed to U.S. and Canadian safety standards
 5VA flammability rating on back plate and spacer
 Polycarbonate complies with FDA regulations for food contact applications



Dimensions

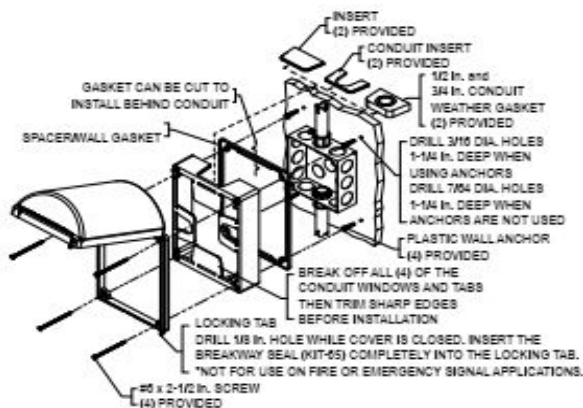

Find out more

American Gas Safety LLC

www.americangassafety.com

Head office:

6304 Benjamin Road, Suite 502, Tampa, FL 33634

Tel: (727) 608-4375

Email: info@americangassafety.com



Specification

1/2 HP, 6 amps @ 30 VDC.

Switch rating 10 amps @ 240 VAC resistive and has a timer range: 2 - 60 seconds (± 15%).

Temperature range of button 15° to 120°F (-9° to +49°C).

Two (2) Form "C" contacts, DPDT, rated 10 amps @ 125/250 VAC, 1 N.O. and 1 N.C. contact.